



EDAN

iM70  
Patient Monitor



iM70  
Patient Monitor



EDAN Edan Instruments, Inc.

■ 3/F – B, Nanshan Medical Equipments Park, Nanhai Rd 1019#, Shekou, Nanshan Shenzhen, 518067 P.R. China  
■ Tel: +86-755-26898326 ■ Fax: +86-755-26898330 ■ www.edan.com.cn ■ Email: info@edan.com.cn

■ All rights reserved. Features and specifications are subject to change without notice



CE 0123

ENG-PM-iM70-V1.3-20140115



Care for Health

**EDAN**

# iM70

Patient Monitor



Maximum 11 Waveforms



No-fan Design

Night Mode



Pitch Tone Thermal Recorder



## Standard Parameters

- 3/5-lead ECG, HR, RESP, EDAN SpO<sub>2</sub>, EDAN NIBP, PR, 2-TEMP

## Optional Parameters

- 2-IBP, C.O., EDAN G2 CO<sub>2</sub> (Sidestream), Resironics CO<sub>2</sub> (Mainstream and Sidestream), PHASEIN Anesthesia Gas/O<sub>2</sub>, Nellcor OxiMax™ SpO<sub>2</sub>, Omron® NIBP

**> Reliable Algorithms**

- iSEAP™ ECG algorithm optimized for arrhythmia detection, pacemaker detection, and HR measurement
- iMAT™ SpO<sub>2</sub> algorithm with outstanding motion resistance and low perfusion resistance performance
- iCUFS™ NIBP algorithm optimized for cardiac patients, hypertensive patients, and neonatal patients

**> Multiple Display Modes****> End tidal Carbon Dioxide for Intubated/Non-Intubated Patients**EDAN G2 CO<sub>2</sub> (Sidestream)

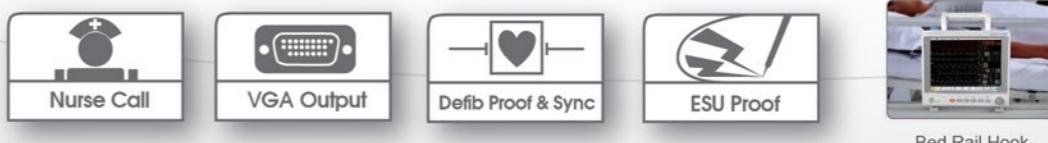
- Superior water trap design for accurate monitoring
- iCARB™ algorithm with intelligent CO<sub>2</sub> pseudo wave identification technology
- Multiple sampling accessories as options for adult, child and neonate patients

Resironics CO<sub>2</sub> (Mainstream/Sidestream)

- Plug & play module design
- Dehumidification tube instead of water trap
- Low sampling rate of 50ml/min suitable for all types of patients

**> PHASEIN Anesthetic Gas/O<sub>2</sub> (Mainstream/Sidestream)**

- Unique Plug & Play module for mainstream anesthetic gas monitoring
- The no moisture sampling line design suitable for all clinical applications
- A stable low flow of 50mL/min for all types of patients

**Internal Temp Storage:****1200**

NIBP Measurement Review

**120 h**

Trend Review

**60**

Alarm Review

**120 s**

Frozen Waveform